




B-15 MATIC

Cod. 00935000

EAN 8422248111102

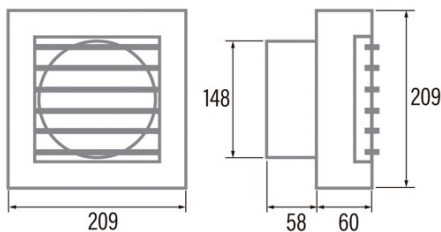

INFORMACIÓN GENERAL

| | |
|-----------|---------------|
| EAN/UPC | 8422248111102 |
| Subfamily | Axial |

General features

| | |
|----------------------------------------|----------------|
| Motor type | AC/SHADED POLE |
| Motor Model | SP5830 |
| Motor power (W) | 28 |
| Lightning Technology | N/A |
| Light Quantity | N/A |
| Filter Type | N/A |
| Number of layers | N/A |
| Control description | N/A |
| Power levels | N/A |
| Timer | - |
| Timer Hygro | - |
| Electronic filter saturation indicator | - |
| Dimmable lighting | - |

Installation

| | |
|---------------------------|------|
| Width (mm) | 209 |
| Height (mm) | 209 |
| Depth (mm) | 60 |
| Total minimum height (mm) | 2300 |
| Outlet diameter (mm) | 148 |
| Maximum pressure (Pa) | 63 |
| Anti-return flap included | - |
| Easy installation system | No |

Power connection

| | |
|-----------------------------------|----------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 28 |
| Protection against electric shock | Class II |
| Plug type | No plug |

Accessories

| | |
|----------------------|---------|
| Fixed Grid | 1930200 |
| Overpressure shutter | 1930300 |
| Window Kit | 1930000 |
| Window Fixing Ring | 1930100 |

Power and water connection

| | |
|-----------------------------------|----------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 28 |
| Protection against electric shock | Class II |
| Plug type | No plug |