




S PRO 7000 X

Cod. 02075411

EAN 8422248371438

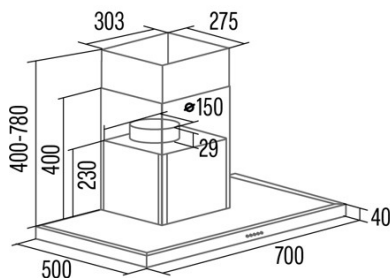

GENERAL INFORMATION

| | |
|-----------|---------------|
| EAN/UPC | 8422248371438 |
| Subfamily | Box |

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|-------|
| AEC (Annual energy consumption) (kWh/year) | 67,7 |
| EEl class (energy efficiency class) | A |
| FDE (fluid dynamic efficiency) | 29,2 |
| FDE class (fluid dynamic efficiency class) | A |
| LE (light efficiency) (Lux/W) | 43 |
| LE class (light efficiency class) | A |
| GFE (grease filtering efficiency) | 76,3 |
| GFE class (grease filtering efficiency class) | C |
| Airflow in normal mode MIN (m3/h) | 419 |
| Airflow in normal mode MAX (m3/h) | 573,9 |
| Airflow in boost mode MIN (m3/h) | 1001 |
| Acoustic power in normal mode MIN (dB) | 64 |
| Acoustic power in normal mode MAX (dB) | 72 |
| Acoustic power boost mode (dB) | 75 |
| Po (energy consumption in off mode) (W) | 0 |
| Ps (energy consumption in standby mode) (W) | 0,48 |

Integration directive EU 66/2014

| | |
|--|-------|
| f (time increase factor) | 0,9 |
| EEl (Energy Efficiency Index) | 53,8 |
| QBEP (maximum efficiency at air flow point) (m3/h) | 489 |
| PBEP (maximum efficiency at pressure point) (Pa) | 424 |
| WBEP (power consumption at maximum efficiency) (W) | 196,9 |
| WL (nominal power lighting system) (W) | 4,1 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 176,4 |

External Dimensions

| | |
|---------------------------|-----|
| Width (mm) | 760 |
| Depth (mm) | 570 |
| Maximum total height (mm) | 830 |
| Minimum total height (mm) | 450 |
| Diamètre de sortie (mm) | 150 |

Characteristics

| | |
|-----------------------------|--------------------------------------|
| Motor quantity | 1 |
| Maximum pressure (Pa) | 501,17 |
| Filter technology | Aluminium mesh |
| Control technology | PANEL ELECTRONICO DISPLAY DIGITAL |
| Power levels | 3 |
| Timer | √ |
| Filter saturation indicator | - |
| Connectivity | No |

Lighting

| | |
|----------------|--------|
| Light model | ECOLED |
| Ray technology | LED |

Installation

| | |
|---|-----|
| Minimum distance to electric plate (mm) | 550 |
| Minimum distance to gas plate (mm) | 650 |

Electric connection

| | |
|-------------------------|---------|
| Nominal voltage (V) | 220-240 |
| Nominal frequency (Hz) | 50 |
| Nominal input power (W) | 383 |

| | |
|---------------------------|---------|
| Electric shock protection | Class I |
| Power cord length (m) | 1,2 |
| Plug type | Type F |