




# GI 3002 X

Cod. **08039600**

EAN **8422248108829**

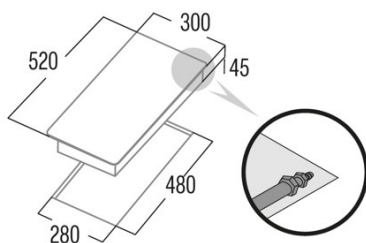

## GENERAL INFORMATION

EAN/UPC	8422248108829
Subfamily	Gas

## Product sheet

Number of cooking zones	2
Zone 1: Technology	Gas
Zone 1: Type of zone	Rapid
Zone 1: Position	Rear
Zone 1: Zone diameter (mm)	N/A
Zone 1: Power (kW)	3
Zone 1: Consumption (Wh / kg)	286
Zone 1B: Zone diameter (mm)	N/A
Zone 1C: Zone diameter (mm)	N/A
Zone 2: Technology	Gas
Zone 2: Type of zone	Auxiliary
Zone 2: Position	Front
Zone 2: Zone diameter (mm)	N/A
Zone 2: Power (kW)	1
Zone 2: Consumption (Wh / kg)	95
Zone 2B: Zone diameter (mm)	N/A
Zone 2C: Zone diameter (mm)	N/A
Zone 3: Technology	N/A
Zone 3: Zone diameter (mm)	N/A
Zone 3B: Zone diameter (mm)	N/A
Zone 3C: Zone diameter (mm)	N/A
Zone 4: Technology	N/A
Zone 4: Zone diameter (mm)	N/A
Zone 4B: Zone diameter (mm)	N/A
Zone 4C: Zone diameter (mm)	N/A
Zone 5: Technology	N/A
Zone 5: Zone diameter (mm)	N/A
Zone 5B: Zone diameter (mm)	N/A
Zone 5C: Zone diameter (mm)	N/A
Zone 6: Technology	N/A
Zone 6: Zone diameter (mm)	N/A
Zone 6B: Zone diameter (mm)	N/A
Zone 6C: Zone diameter (mm)	N/A

## Dimensions

Width (mm)	300
Height (mm)	45
Depth (mm)	520
Built-in width (mm)	280
Built-in depth (mm)	480
Easy installation system	Clamping System

## Finishing

Material	Stainless Steel
Bevel	No
Frame	No
Cooking supports	Cast Iron

## Control

Control type	Mechanical
Control position	Front Centre
Independent zone control	√
Hidden control	-
Power levels	Gradual
Knob type	N/A
Cooking time programming	-
Countdown alarm	-

Power management	-
Available power limits (kW)	No
Connectivity	No
Autoignition	220-240V

### Safety

Safety lock	-
Child lock	No
Residual heat indicator	-
Automatic cookware detection	-
Smart cookware detection	-
Automatic safety shutdown	-
Liquid spill detection	-
Safety valve	√

### Electrical connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	4
Electric shock protection	Class I
Plug type	No plug