




# V-6000 X

Cod. 02002397

EAN 8422248106351

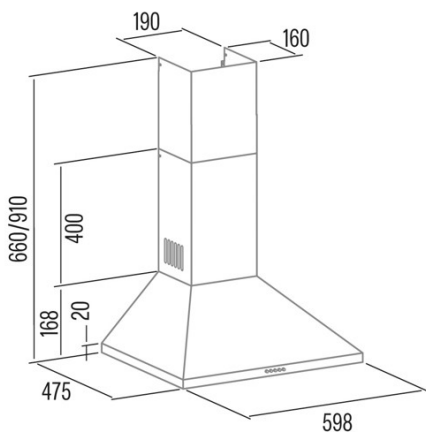

## GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248106351 |
| Subfamily | Chimney       |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|   |       |
|---|-------|
| AEC (Annual energy consumption) (kWh/year)    | 59    |
| EEl class (energy efficiency class)           | C     |
| FDE (fluid dynamic efficiency)                | 11,3  |
| FDE class (fluid dynamic efficiency class)    | E     |
| LE (light efficiency) (Lux/W)                 | 28,6  |
| LE class (light efficiency class)             | A     |
| GFE (grease filtering efficiency)             | 62,5  |
| GFE class (grease filtering efficiency class) | E     |
| Airflow in normal mode MIN (m3/h)             | 318,4 |
| Airflow in normal mode MAX (m3/h)             | 479,5 |
| Acoustic power in normal mode MIN (dB)        | 52    |
| Acoustic power in normal mode MAX (dB)        | 64    |
| Po (energy consumption in off mode) (W)       | 0     |

### Integration directive EU 66/2014

|  |       |
|--|-------|
| <i>f</i> (time increase factor)                            | 1,6   |
| EEl (Energy Efficiency Index)                              | 83,5  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 239,7 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 166   |
| WBEP (power consumption at maximum efficiency) (W)         | 97,9  |
| WL (nominal power lighting system) (W)                     | 3     |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 85,8  |

### External Dimensions

|                           |          |
|---------------------------|----------|
| Width (mm)                | 600      |
| Depth (mm)                | 470      |
| Maximum total height (mm) | 870      |
| Minimum total height (mm) | 570      |
| Diamètre de sortie (mm)   | 150, 125 |

### Characteristics

|                                       |                        |
|---------------------------------------|------------------------|
| Motor quantity                        | 1                      |
| Maximum pressure (Pa)                 | 227                    |
| Filter technology                     | Aluminium mesh         |
| Control technology                    | Mechanical push button |
| Booster                               | -                      |
| Timer                                 | -                      |
| Filter saturation indicator           | -                      |
| Charcoal filter replacement indicator | -                      |
| Dimmer function                       | -                      |
| Connectivity                          | No                     |
| Remote control                        | -                      |
| Display                               | -                      |

### Lighting

|                |          |
|----------------|----------|
| Light model    | LED E-14 |
| Ray technology | LED      |

### Installation

|   |          |
|---|----------|
| Minimum distance to electric plate (mm) | 650      |
| Minimum distance to gas plate (mm)      | 650      |
| Recirculation option                    | √        |
| Charcoal filter                         | -        |
| Back draught shutter                    | Included |
| Inner shield                            | -        |

**Electric connection**

|                           |         |
|---------------------------|---------|
| Nominal voltage (V)       | 220-240 |
| Nominal frequency (Hz)    | 50      |
| Nominal input power (W)   | 123     |
| Electric shock protection | Class I |

**Accessories**

|                                 |          |
|---------------------------------|----------|
| Upper decorative duct extension | 02863304 |
| Activated charcoal filter       | 02859496 |
| Noiseless flexible duct         | 02893002 |