




## TFH 6630 BK

Cod. 02010302

EAN 8422248082402

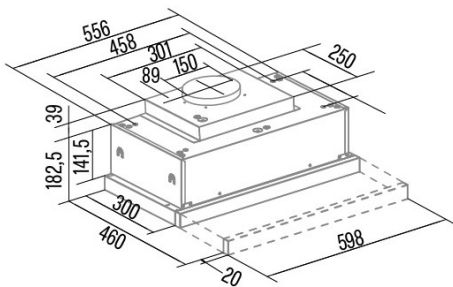

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248082402 |
| Subfamily | Telescopic    |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|   |      |
|---|------|
| AEC (Annual energy consumption) (kWh/year)    | 19,3 |
| EEl class (energy efficiency class)           | AP   |
| FDE (fluid dynamic efficiency)                | 34,4 |
| FDE class (fluid dynamic efficiency class)    | A    |
| LE (light efficiency) (Lux/W)                 | 21,9 |
| LE class (light efficiency class)             | B    |
| GFE (grease filtering efficiency)             | 66,4 |
| GFE class (grease filtering efficiency class) | D    |
| Airflow in normal mode MIN (m3/h)             | 210  |
| Airflow in normal mode MAX (m3/h)             | 410  |
| Airflow in boost mode MIN (m3/h)              | 605  |
| Acoustic power in normal mode MIN (dB)        | 47   |
| Acoustic power in normal mode MAX (dB)        | 64   |
| Acoustic power boost mode (dB)                | 70   |
| Po (energy consumption in off mode) (W)       | 0,4  |
| Ps (energy consumption in standby mode) (W)   | 0    |

### Integration directive EU 66/2014

|  |       |
|--|-------|
| f (time increase factor)                                   | 0,8   |
| EEl (Energy Efficiency Index)                              | 39,2  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 275,2 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 263   |
| WBEP (power consumption at maximum efficiency) (W)         | 58,6  |
| WL (nominal power lighting system) (W)                     | 3     |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 67    |

### External Dimensions

|                           |       |
|---------------------------|-------|
| Width (mm)                | 600   |
| Depth (mm)                | 300   |
| Maximum total height (mm) | 221,5 |
| Minimum total height (mm) | 221,5 |
| Diamètre de sortie (mm)   | 150   |

### Characteristics

|                                       |                          |
|---------------------------------------|--------------------------|
| Motor quantity                        | 1                        |
| Motor model                           | T1DC                     |
| Maximum pressure (Pa)                 | 250                      |
| Filter technology                     | Aluminium mesh           |
| Control technology                    | Electronic Touch Control |
| Booster                               | √                        |
| Power levels                          | 6                        |
| Timer                                 | √                        |
| Filter saturation indicator           | √                        |
| Charcoal filter replacement indicator | -                        |
| Dimmer function                       | √                        |
| Connectivity                          | -                        |
| Remote control                        | -                        |
| Display                               | Display_grafico          |

### Lighting

|                |       |
|----------------|-------|
| Light model    | SSLED |
| Ray technology | LED   |

### Installation

|   |     |
|---|-----|
| Minimum distance to electric plate (mm) | 550 |
| Minimum distance to gas plate (mm)      | 650 |

|                      |   |
|----------------------|---|
| Recirculation option | √ |
| Charcoal filter      | - |
| Back draught shutter | - |
| Inner shield         | - |

---

#### Electric connection

|                           |         |
|---------------------------|---------|
| Nominal voltage (V)       | 220-240 |
| Nominal frequency (Hz)    | 50      |
| Nominal input power (W)   | 93      |
| Electric shock protection | Class I |
| Power cord length (m)     | 0,7     |
| Plug type                 | No plug |

---

#### Accessories

|                                 |         |
|---------------------------------|---------|
| Upper decorative duct extension | No      |
| White decorative duct           | No      |
| Black decorative duct           | No      |
| Island tube booster             | No      |
| Back draught shutter            | 2832004 |
| MAX PRO Metal filter            | No      |
| Activated charcoal filter       | 2859394 |
| Noiseless flexible duct         | 2893002 |
| Recirculation kit               | No      |

---