




## CTRC-30-M

Cod. 03110003

EAN 8422248096621

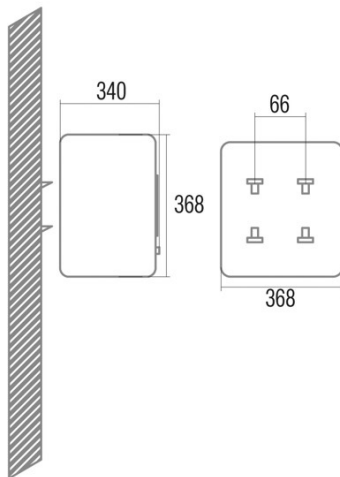

### GENERAL INFORMATION

EAN/UPC	8422248096621
Subfamily	Electric

### Product fiche according to EU Regulation No 812/2012

Declared load profile	S
Water heating energy class	C
Water heating energy efficiency (%)	33
Annual electricity consumption (kWh/year)	558
Thermostat temperature settings	75

### Features

Capacity (L)	30
Number of people	1-2
Instalación	Vertical
Minimum fixed temperature	30
Maximum settings temperature	75
Type of heating element	Enamel
Heating time 15°C-65°C (min)	33
Static losses at 65°C (kWh/24h)	2,46
Coating thickness (mm)	5

### Controls

Control type	Mechanical
Control position	Front
Electrical connection indicator	-
Temperature indicator	-
Heating indicator	-

### Safety

Overheating protection	√
Safety temperature (°C)	101
Freezing protection	-
Water protection index	IPX4
Maximum working pressure (Mpa)	0,75
Magnesium anode dimensions (mm)	D18x110

### Power connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	1500
Electric shock protection	Class I
Power cord length (m)	1,5
Plug type	Type F

### Installation

Width (mm)	440
Height (mm)	440
Depth (mm)	420