




AS 600

Cod. **08000406**

EAN **8422248198554**

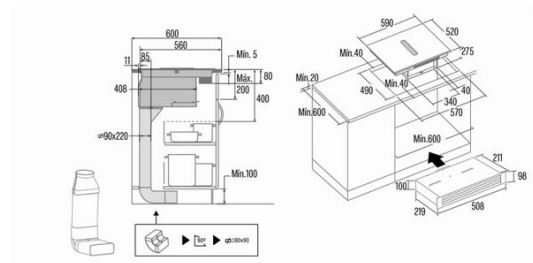

GENERAL INFORMATION

| | |
|-----------|---------------|
| EAN/UPC | 8422248198554 |
| Subfamily | Flow-in |

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|-------|
| AEC (Annual energy consumption) (kWh/year) | 29 |
| EEL class (energy efficiency class) | A+ |
| FDE (fluid dynamic efficiency) | 32 |
| FDE class (fluid dynamic efficiency class) | A |
| LE (light efficiency) (Lux/W) | 0 |
| GFE (grease filtering efficiency) | 45,8 |
| GFE class (grease filtering efficiency class) | F |
| Airflow in normal mode MIN (m3/h) | 246,4 |
| Airflow in normal mode MAX (m3/h) | 446,3 |
| Airflow in boost mode MIN (m3/h) | 531,5 |
| Acoustic power in normal mode MIN (dB) | 45 |
| Acoustic power in normal mode MAX (dB) | 64 |
| Acoustic power boost mode (dB) | 67 |
| Po (energy consumption in off mode) (W) | 0,4 |
| Ps (energy consumption in standby mode) (W) | 0 |

Product sheet

| | |
|-------------------------------|----------------------|
| Number of cooking zones | 4 |
| Zone 1: Technology | Induction |
| Zone 1: Type of zone | Rectangular Flexible |
| Zone 1: Position | Front Left |
| Zone 1: Zone diameter (mm) | 19 |
| Zone 1: Power (kW) | 15 |
| Zone 1: Booster (kW) | 2 |
| Zone 1: Consumption (Wh / kg) | 193,56 |
| Zone 2: Technology | Induction |
| Zone 2: Type of zone | Rectangular Flexible |
| Zone 2: Position | Rear Left |
| Zone 2: Zone diameter (mm) | 19 |
| Zone 2: Power (kW) | 2 |
| Zone 2: Booster (kW) | 2,8 |
| Zone 2: Consumption (Wh / kg) | 173,73 |
| Zone 3: Technology | Induction |
| Zone 3: Type of zone | Rectangular Flexible |
| Zone 3: Position | Rear Right |
| Zone 3: Zone diameter (mm) | 19 |
| Zone 3: Power (kW) | 2 |
| Zone 3: Booster (kW) | 2,8 |
| Zone 3: Consumption (Wh / kg) | 191,01 |
| Zone 4: Technology | Induction |
| Zone 4: Type of zone | Rectangular Flexible |
| Zone 4: Position | Front Right |
| Zone 4: Zone diameter (mm) | 19 |
| Zone 4: Power (kW) | 1,5 |
| Zone 4: Booster (kW) | 2 |
| Zone 4: Consumption (Wh / kg) | 189,12 |

Integration directive EU 66/2014

| | |
|--|-------|
| f (time increase factor) | 1 |
| EEL (Energy Efficiency Index) | 49,2 |
| QBEP (maximum efficiency at air flow point) (m3/h) | 264,3 |
| PBEP (maximum efficiency at pressure point) (Pa) | 294 |
| WBEP (power consumption at maximum efficiency) (W) | 79,4 |
| WL (nominal power lighting system) (W) | 0 |

Dimensions

| | |
|--------------------------|-----------|
| Width (mm) | 590 |
| Height (mm) | 275 |
| Depth (mm) | 520 |
| Built-in width (mm) | 570 |
| Built-in depth (mm) | 504 |
| Easy installation system | Quick Fix |

External Dimensions

| | |
|---------------------------|-----|
| Width (mm) | 590 |
| Depth (mm) | 520 |
| Maximum total height (mm) | 275 |
| Minimum total height (mm) | 570 |
| Diamètre de sortie (mm) | 150 |

Finishing

| | |
|------------------|-------|
| Material | Glass |
| Bevel | Front |
| Frame | No |
| Cooking supports | N/A |

Characteristics

| | |
|---------------------------------------|----------------|
| Motor quantity | 1 |
| Motor model | BT4DC |
| Filter technology | Aluminium mesh |
| Control technology | TFT |
| Booster | √ |
| Power levels | 6 |
| Timer | √ |
| Filter saturation indicator | - |
| Charcoal filter replacement indicator | - |
| Dimmer function | - |
| Connectivity | √ |
| Remote control | - |
| Display | Display |

Control

| | |
|-----------------------------|--------------|
| Control type | TFT |
| Control position | Front Centre |
| Independent zone control | - |
| Hidden control | - |
| Power levels | 9 + Booster |
| Knob type | N/A |
| Cooking time programming | √ |
| Power management | - |
| Available power limits (kW) | No |
| Connectivity | Auto |
| Autoignition | N/A |

Safety

| | |
|------------------------------|-----------|
| Safety lock | √ |
| Child lock | Yes (Key) |
| Residual heat indicator | √ |
| Automatic cookware detection | √ |
| Smart cookware detection | - |
| Automatic safety shutdown | √ |
| Liquid spill detection | √ |
| Safety valve | - |

Installation

| | |
|----------------------|----|
| Recirculation option | - |
| Charcoal filter | - |
| Back draught shutter | No |
| Inner shield | - |

Electrical connection

| | |
|-------------------------|---------|
| Nominal voltage (V) | 220-240 |
| Nominal frequency (Hz) | 50/60 |
| Nominal input power (W) | 7335 |

| | |
|---------------------------|---------|
| Electric shock protection | Class I |
| Plug type | No plug |

Electric connection

| | |
|---------------------------|---------|
| Nominal voltage (V) | 220-240 |
| Nominal frequency (Hz) | 50/60 |
| Nominal input power (W) | 7335 |
| Electric shock protection | Class I |
| Plug type | No plug |

Accessories

| | |
|-------------------|---------------------|
| Recirculation kit | 02800992 + 02801000 |
|-------------------|---------------------|
