




S-BOX X

Cod. **02001301**

EAN **8422248062039**

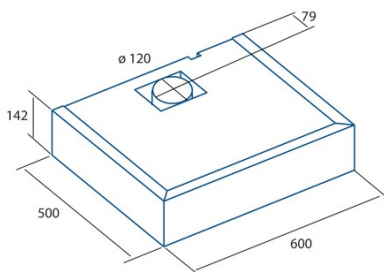

GENERAL INFORMATION

EAN/UPC	8422248062039
Subfamily	Conventional

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	52,5
EEl class (energy efficiency class)	2893002
FDE (fluid dynamic efficiency)	11,9
FDE class (fluid dynamic efficiency class)	E
LE (light efficiency) (Lux/W)	4,9
LE class (light efficiency class)	F
GFE (grease filtering efficiency)	68
GFE class (grease filtering efficiency class)	D
Airflow in normal mode MIN (m3/h)	1
Airflow in normal mode MAX (m3/h)	390
Acoustic power in normal mode MIN (dB)	45
Acoustic power in normal mode MAX (dB)	57
Po (energy consumption in off mode) (W)	0

Integration directive EU 66/2014

<i>f</i> (time increase factor)	1,6
EEl (Energy Efficiency Index)	83,4
QBEP (maximum efficiency at air flow point) (m3/h)	198,2
PBEP (maximum efficiency at pressure point) (Pa)	Aluminium mesh
WBEP (power consumption at maximum efficiency) (W)	68,6
WL (nominal power lighting system) (W)	18
EMIDDLE (Average illuminance on the cooking surface) (lux)	89

External Dimensions

Width (mm)	-
Depth (mm)	2883400
Maximum total height (mm)	142
Minimum total height (mm)	142

Characteristics

Motor quantity	1
Motor model	TF2003
Maximum pressure (Pa)	Cassette
Free out airflow (m3/h)	Type C
Filter technology	Aluminium mesh
Control technology	-
Booster	-
Power levels	3
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	Press button
Dimmer function	-
Connectivity	270
Remote control	-
Display	-

Lighting

Ray technology	4rgy Saving
Light bulb type	1110

Installation

Minimum distance to electric plate (mm)	Centred
Minimum distance to gas plate (mm)	650
Recirculation option	Vertical push button
Charcoal filter	Halogen_E14
Back draught shutter	2

Installation system

AC/INDUCTION

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	1,5
Electric shock protection	Class I
Power cord length (m)	1,5
Plug type	50lug

Accessories

Upper decorative duct extension	No
White decorative duct	No
Black decorative duct	No
Island tube booster	No
Back draught shutter	2849003
MAX PRO Metal filter	No
Activated charcoal filter	2804300
Noiseless flexible duct	No
Recirculation kit	No
