




X-MART 10 MATIC T

Cod. **01016000**

EAN **8422248003551**

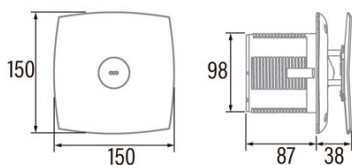

GENERAL INFORMATION

| | |
|-----------|---------------|
| EAN/UPC | 8422248003551 |
| Subfamily | Axial |

General features

| | |
|--|----------------|
| Motor type | AC/SHADED POLE |
| Motor model | SP5812 |
| Motor power (W) | 15 |
| Lighting technology | N/A |
| Light quantity | N/A |
| Filter type | N/A |
| Number of layers | N/A |
| Control description | Potentiometer |
| Power levels | N/A |
| Timer | √ |
| Hygro timer | - |
| Electronic filter saturation indicator | - |
| Dimmable lighting | - |

Installation

| | |
|---------------------------|-----------|
| Width (mm) | 150 |
| Height (mm) | 150 |
| Depth (mm) | 87 |
| Total minimum height (mm) | 2300 |
| Outlet diameter (mm) | 98 |
| Maximum pressure (Pa) | 25 |
| Anti-return flap included | - |
| Easy installation system | Quick_Flx |

Power connection

| | |
|---------------------------|----------|
| Nominal voltage (V) | 220-240 |
| Nominal frequency (Hz) | 50/60 |
| Nominal input power (W) | 15 |
| Electric shock protection | Class II |
| Plug type | No plug |

Accessories

| | |
|---------------------------|---------|
| Fixed grill | 1910200 |
| Overpressure relief valve | 1910300 |
| Window fixing ring | 1910100 |
| Backdraught seal | 1990097 |

Power and water connection

| | |
|---------------------------|----------|
| Nominal voltage (V) | 220-240 |
| Nominal frequency (Hz) | 50/60 |
| Nominal input power (W) | 15 |
| Electric shock protection | Class II |
| Plug type | No plug |