




# V-6000 X

Cod. 02002397

EAN 8422248106351

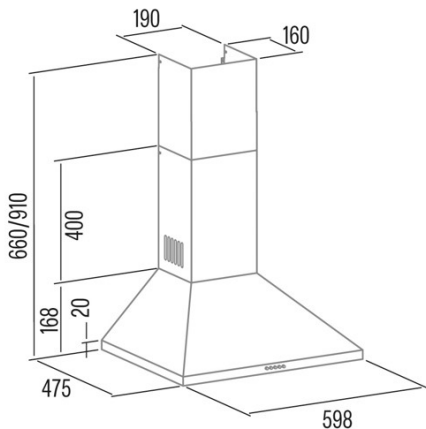

## GENERAL INFORMATION

EAN/UPC	8422248106351
Subfamily	Chimney

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	59
EEl class (energy efficiency class)	C
FDE (fluid dynamic efficiency)	11,3
FDE class (fluid dynamic efficiency class)	E
LE (light efficiency) (Lux/W)	28,6
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	62,5
GFE class (grease filtering efficiency class)	E
Airflow in normal mode MIN (m3/h)	318,4
Airflow in normal mode MAX (m3/h)	479,5
Acoustic power in normal mode MIN (dB)	52
Acoustic power in normal mode MAX (dB)	64
Po (energy consumption in off mode) (W)	0

### Integration directive EU 66/2014

<i>f</i> (time increase factor)	1,6
EEl (Energy Efficiency Index)	83,5
QBEP (maximum efficiency at air flow point) (m3/h)	239,7
PBEP (maximum efficiency at pressure point) (Pa)	166
WBEP (power consumption at maximum efficiency) (W)	97,9
WL (nominal power lighting system) (W)	3
EMIDDLE (Average illuminance on the cooking surface) (lux)	85,8

### External Dimensions

Width (mm)	600
Depth (mm)	470
Maximum total height (mm)	870
Minimum total height (mm)	570
Diamètre de sortie (mm)	150, 125

### Characteristics

Motor quantity	1
Maximum pressure (Pa)	227
Filter technology	Aluminium mesh
Control technology	Mechanical push button
Booster	-
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	No
Remote control	-
Display	-

### Lighting

Light model	LED E-14
Ray technology	LED

### Installation

Minimum distance to electric plate (mm)	650
Minimum distance to gas plate (mm)	650
Recirculation option	√
Charcoal filter	-
Back draught shutter	Included
Inner shield	-

**Electric connection**

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	123
Electric shock protection	Class I

**Accessories**

Upper decorative duct extension	02863304
Activated charcoal filter	02859496
Noiseless flexible duct	02893002