




TFB-5160 BK

Cod. **02034408**

EAN **8422248108096**

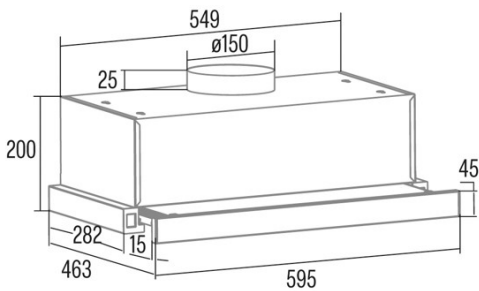

GENERAL INFORMATION

| | |
|-----------|---------------|
| EAN/UPC | 8422248108096 |
| Subfamily | Telescopic |

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|-------|
| AEC (Annual energy consumption) (kWh/year) | 36,5 |
| EEl class (energy efficiency class) | C |
| FDE (fluid dynamic efficiency) | 8,86 |
| FDE class (fluid dynamic efficiency class) | E |
| LE (light efficiency) (Lux/W) | 43,9 |
| LE class (light efficiency class) | A |
| GFE (grease filtering efficiency) | 60,6 |
| GFE class (grease filtering efficiency class) | E |
| Airflow in normal mode MIN (m3/h) | 158,4 |
| Airflow in normal mode MAX (m3/h) | 297,2 |
| Acoustic power in normal mode MIN (dB) | 47,8 |
| Acoustic power in normal mode MAX (dB) | 61,1 |
| Po (energy consumption in off mode) (W) | 0 |

Integration directive EU 66/2014

| | |
|--|--------|
| f (time increase factor) | 1,68 |
| EEl (Energy Efficiency Index) | 76,34 |
| QBEP (maximum efficiency at air flow point) (m3/h) | 158,4 |
| PBEP (maximum efficiency at pressure point) (Pa) | 115,03 |
| WBEP (power consumption at maximum efficiency) (W) | 57,11 |
| WL (nominal power lighting system) (W) | 2 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 87,8 |

External Dimensions

| | |
|---------------------------|-----|
| Width (mm) | 595 |
| Depth (mm) | 297 |
| Maximum total height (mm) | 200 |
| Minimum total height (mm) | 225 |
| Diamètre de sortie (mm) | 150 |

Characteristics

| | |
|---------------------------------------|--------------------------|
| Motor quantity | 1 |
| Motor model | TT300 |
| Maximum pressure (Pa) | 170 |
| Free out airflow (m3/h) | 700 |
| Filter technology | Aluminium mesh |
| Control technology | Mechanical rocker switch |
| Booster | - |
| Power levels | 2 |
| Timer | - |
| Filter saturation indicator | - |
| Charcoal filter replacement indicator | - |
| Dimmer function | - |
| Connectivity | - |
| Remote control | - |
| Display | - |

Lighting

| | |
|----------------|-----|
| Ray technology | LED |
|----------------|-----|

Installation

| | |
|---|----------|
| Minimum distance to electric plate (mm) | 550 |
| Minimum distance to gas plate (mm) | 650 |
| Recirculation option | √ |
| Charcoal filter | - |
| Back draught shutter | Included |

Inner shield -

Electric connection

| | |
|---------------------------|---------|
| Nominal voltage (V) | 220-240 |
| Nominal frequency (Hz) | 50/60 |
| Nominal input power (W) | 67 |
| Electric shock protection | Class I |
| Plug type | Type F |

Accessories

| | |
|---------------------------------|----------|
| Upper decorative duct extension | No |
| White decorative duct | No |
| Black decorative duct | No |
| Island tube booster | No |
| Back draught shutter | Included |
| MAX PRO Metal filter | No |
| Activated charcoal filter | 02859495 |
| Noiseless flexible duct | 02893002 |
| Recirculation kit | 02894400 |
