




# AS 600

Cod. **08000406**

EAN **8422248198554**

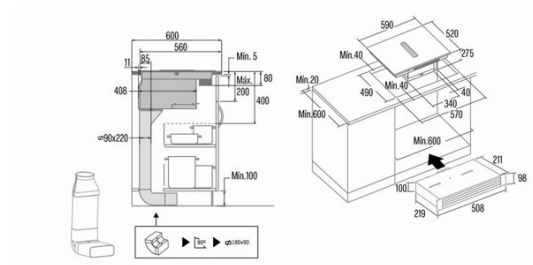

## GENERAL INFORMATION

EAN/UPC	8422248198554
Subfamily	Flow-in

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	29
EEL class (energy efficiency class)	A+
FDE (fluid dynamic efficiency)	32
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (Lux/W)	0
GFE (grease filtering efficiency)	45,8
GFE class (grease filtering efficiency class)	F
Airflow in normal mode MIN (m3/h)	246,4
Airflow in normal mode MAX (m3/h)	446,3
Airflow in boost mode MIN (m3/h)	531,5
Acoustic power in normal mode MIN (dB)	45
Acoustic power in normal mode MAX (dB)	64
Acoustic power boost mode (dB)	67
Po (energy consumption in off mode) (W)	0,4
Ps (energy consumption in standby mode) (W)	0

### Product sheet

Number of cooking zones	4
Zone 1: Technology	Induction
Zone 1: Type of zone	Rectangular Flexible
Zone 1: Position	Front Left
Zone 1: Zone diameter (mm)	19
Zone 1: Power (kW)	15
Zone 1: Booster (kW)	2
Zone 1: Consumption (Wh / kg)	193,56
Zone 2: Technology	Induction
Zone 2: Type of zone	Rectangular Flexible
Zone 2: Position	Rear Left
Zone 2: Zone diameter (mm)	19
Zone 2: Power (kW)	2
Zone 2: Booster (kW)	2,8
Zone 2: Consumption (Wh / kg)	173,73
Zone 3: Technology	Induction
Zone 3: Type of zone	Rectangular Flexible
Zone 3: Position	Rear Right
Zone 3: Zone diameter (mm)	19
Zone 3: Power (kW)	2
Zone 3: Booster (kW)	2,8
Zone 3: Consumption (Wh / kg)	191,01
Zone 4: Technology	Induction
Zone 4: Type of zone	Rectangular Flexible
Zone 4: Position	Front Right
Zone 4: Zone diameter (mm)	19
Zone 4: Power (kW)	1,5
Zone 4: Booster (kW)	2
Zone 4: Consumption (Wh / kg)	189,12

### Integration directive EU 66/2014

f (time increase factor)	1
EEL (Energy Efficiency Index)	49,2
QBEP (maximum efficiency at air flow point) (m3/h)	264,3
PBEP (maximum efficiency at pressure point) (Pa)	294
WBEP (power consumption at maximum efficiency) (W)	79,4
WL (nominal power lighting system) (W)	0

### Dimensions

Width (mm)	590
Height (mm)	275
Depth (mm)	520
Built-in width (mm)	570
Built-in depth (mm)	504
Easy installation system	Quick Fix

### External Dimensions

Width (mm)	590
Depth (mm)	520
Maximum total height (mm)	275
Minimum total height (mm)	570
Diamètre de sortie (mm)	150

### Finishing

Material	Glass
Bevel	Front
Frame	No
Cooking supports	N/A

### Characteristics

Motor quantity	1
Motor model	BT4DC
Filter technology	Aluminium mesh
Control technology	TFT
Booster	√
Power levels	6
Timer	√
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	√
Remote control	-
Display	Display

### Control

Control type	TFT
Control position	Front Centre
Independent zone control	-
Hidden control	-
Power levels	9 + Booster
Knob type	N/A
Cooking time programming	√
Power management	-
Available power limits (kW)	No
Connectivity	Auto
Autoignition	N/A

### Safety

Safety lock	√
Child lock	Yes (Key)
Residual heat indicator	√
Automatic cookware detection	√
Smart cookware detection	-
Automatic safety shutdown	√
Liquid spill detection	√
Safety valve	-

### Installation

Recirculation option	-
Charcoal filter	-
Back draught shutter	No
Inner shield	-

### Electrical connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	7335

---

Electric shock protection	Class I
Plug type	No plug

---

#### **Electric connection**

---

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	7335
Electric shock protection	Class I
Plug type	No plug

---

#### **Accessories**

---

Recirculation kit	02800992 + 02801000
-------------------	---------------------

---