




## S PRO 9000 BK

Cod. 02075413

EAN 8422248371452

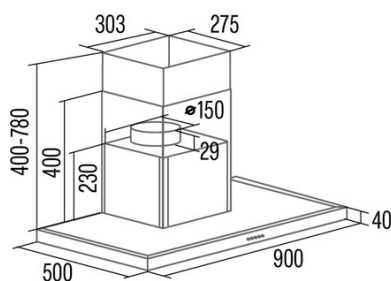

### GENERAL INFORMATION

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248371452 |
| Subfamily | Box           |

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

|   |       |
|---|-------|
| AEC (Annual energy consumption) (kWh/year)    | 59,8  |
| EEl class (energy efficiency class)           | A     |
| FDE (fluid dynamic efficiency)                | 29,3  |
| FDE class (fluid dynamic efficiency class)    | A     |
| LE (light efficiency) (Lux/W)                 | 35    |
| LE class (light efficiency class)             | A     |
| GFE (grease filtering efficiency)             | 76,3  |
| GFE class (grease filtering efficiency class) | C     |
| Airflow in normal mode MIN (m3/h)             | 419   |
| Airflow in normal mode MAX (m3/h)             | 628,2 |
| Airflow in boost mode MIN (m3/h)              | 1027  |
| Acoustic power in normal mode MIN (dB)        | 64    |
| Acoustic power in normal mode MAX (dB)        | 73    |
| Acoustic power boost mode (dB)                | 76    |
| Po (energy consumption in off mode) (W)       | 0     |
| Ps (energy consumption in standby mode) (W)   | 0,48  |

### Integration directive EU 66/2014

|  |       |
|--|-------|
| f (time increase factor)                                   | 0,9   |
| EEl (Energy Efficiency Index)                              | 53,1  |
| QBEP (maximum efficiency at air flow point) (m3/h)         | 438,2 |
| PBEP (maximum efficiency at pressure point) (Pa)           | 416   |
| WBEP (power consumption at maximum efficiency) (W)         | 172,8 |
| WL (nominal power lighting system) (W)                     | 4,2   |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 147,6 |

### External Dimensions

|                           |     |
|---------------------------|-----|
| Width (mm)                | 700 |
| Depth (mm)                | 500 |
| Maximum total height (mm) | 820 |
| Minimum total height (mm) | 440 |
| Diamètre de sortie (mm)   | 150 |

### Characteristics

|                                       |                                      |
|---------------------------------------|--------------------------------------|
| Motor quantity                        | 1                                    |
| Motor model                           | A1000                                |
| Maximum pressure (Pa)                 | 474,33                               |
| Filter technology                     | Aluminium mesh                       |
| Control technology                    | PANEL ELECTRONICO<br>DISPLAY DIGITAL |
| Timer                                 | √                                    |
| Filter saturation indicator           | -                                    |
| Charcoal filter replacement indicator | √                                    |

### Lighting

|                |        |
|----------------|--------|
| Light model    | ECOLED |
| Ray technology | LED    |

### Installation

|   |          |
|---|----------|
| Minimum distance to electric plate (mm) | 550      |
| Minimum distance to gas plate (mm)      | 650      |
| Recirculation option                    | √        |
| Back draught shutter                    | Included |

### Electric connection

|                     |         |
|---------------------|---------|
| Nominal voltage (V) | 220-240 |
|---------------------|---------|

|                           |         |
|---------------------------|---------|
| Nominal frequency (Hz)    | 50      |
| Nominal input power (W)   | 383     |
| Electric shock protection | Class I |
| Power cord length (m)     | 1,2     |
| Plug type                 | Type F  |

---

**Accessories**

|                      |          |
|----------------------|----------|
| Back draught shutter | 02800706 |
|----------------------|----------|

---