




GI 3002 X

Cod. **08039600**

EAN **8422248108829**

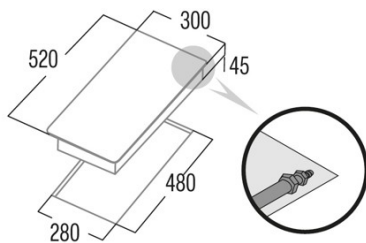

GENERAL INFORMATION

EAN/UPC	8422248108829
Subfamily	Gas

Product sheet

Number of cooking zones	2
Zone 1: Technology	Gas
Zone 1: Type of zone	Rapid
Zone 1: Position	Rear
Zone 1: Zone diameter (mm)	N/A
Zone 1: Power (kW)	3
Zone 1: Consumption (Wh / kg)	286
Zone 1B: Zone diameter (mm)	N/A
Zone 1C: Zone diameter (mm)	N/A
Zone 2: Technology	Gas
Zone 2: Type of zone	Auxiliary
Zone 2: Position	Front
Zone 2: Zone diameter (mm)	N/A
Zone 2: Power (kW)	1
Zone 2: Consumption (Wh / kg)	95
Zone 2B: Zone diameter (mm)	N/A
Zone 2C: Zone diameter (mm)	N/A
Zone 3: Technology	N/A
Zone 3: Zone diameter (mm)	N/A
Zone 3B: Zone diameter (mm)	N/A
Zone 3C: Zone diameter (mm)	N/A
Zone 4: Technology	N/A
Zone 4: Zone diameter (mm)	N/A
Zone 4B: Zone diameter (mm)	N/A
Zone 4C: Zone diameter (mm)	N/A
Zone 5: Technology	N/A
Zone 5: Zone diameter (mm)	N/A
Zone 5B: Zone diameter (mm)	N/A
Zone 5C: Zone diameter (mm)	N/A
Zone 6: Technology	N/A
Zone 6: Zone diameter (mm)	N/A
Zone 6B: Zone diameter (mm)	N/A
Zone 6C: Zone diameter (mm)	N/A

Dimensions

Width (mm)	300
Height (mm)	45
Depth (mm)	520
Built-in width (mm)	280
Built-in depth (mm)	480
Easy installation system	Clamping System

Finishing

Material	Stainless Steel
Bevel	No
Frame	No
Cooking supports	Cast Iron

Control

Control type	Mechanical
Control position	Front Centre
Independent zone control	√
Hidden control	-
Power levels	Gradual
Knob type	N/A
Cooking time programming	-
Countdown alarm	-

Power management	-
Available power limits (kW)	No
Connectivity	No
Autoignition	220-240V

Safety

Safety lock	-
Child lock	No
Residual heat indicator	-
Automatic cookware detection	-
Smart cookware detection	-
Automatic safety shutdown	-
Liquid spill detection	-
Safety valve	√

Electrical connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	4
Electric shock protection	Class I
Plug type	No plug