




# TFB-5160 BK

Cod. **02034408**

EAN **8422248108096**

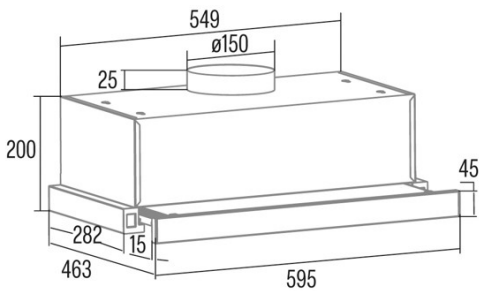

## GENERAL INFORMATION

EAN/UPC	8422248108096
Subfamily	Telescopic

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	36,5
EEl class (energy efficiency class)	C
FDE (fluid dynamic efficiency)	8,86
FDE class (fluid dynamic efficiency class)	E
LE (light efficiency) (Lux/W)	43,9
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	60,6
GFE class (grease filtering efficiency class)	E
Airflow in normal mode MIN (m <sup>3</sup> /h)	158,4
Airflow in normal mode MAX (m <sup>3</sup> /h)	297,2
Acoustic power in normal mode MIN (dB)	47,8
Acoustic power in normal mode MAX (dB)	61,1
Po (energy consumption in off mode) (W)	0

### Integration directive EU 66/2014

<i>f</i> (time increase factor)	1,68
EEl (Energy Efficiency Index)	76,34
QBEP (maximum efficiency at air flow point) (m <sup>3</sup> /h)	158,4
PBEP (maximum efficiency at pressure point) (Pa)	115,03
WBEP (power consumption at maximum efficiency) (W)	57,11
WL (nominal power lighting system) (W)	2
EMIDDLE (Average illuminance on the cooking surface) (lux)	87,8

### External Dimensions

Width (mm)	595
Depth (mm)	297
Maximum total height (mm)	200
Minimum total height (mm)	225
Diamètre de sortie (mm)	150

### Characteristics

Motor quantity	1
Motor model	TT300
Maximum pressure (Pa)	170
Free out airflow (m <sup>3</sup> /h)	700
Filter technology	Aluminium mesh
Control technology	Mechanical rocker switch
Booster	-
Power levels	2
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	-
Remote control	-
Display	-

### Lighting

Ray technology	LED
----------------	-----

### Installation

Minimum distance to electric plate (mm)	550
Minimum distance to gas plate (mm)	650
Recirculation option	√
Charcoal filter	-
Back draught shutter	Included

Inner shield -

---

**Electric connection**

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50/60
Nominal input power (W)	67
Electric shock protection	Class I
Plug type	Type F

---

**Accessories**

Upper decorative duct extension	No
White decorative duct	No
Black decorative duct	No
Island tube booster	No
Back draught shutter	Included
MAX PRO Metal filter	No
Activated charcoal filter	02859495
Noiseless flexible duct	02893002
Recirculation kit	02894400

---