




DUCT IN-LINE 125/320

Cod. **00703000**

EAN **8422248021227**

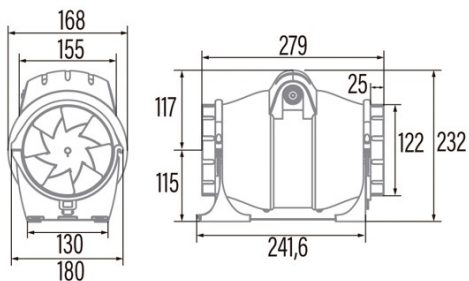

INFORMACIÓN GENERAL

| | |
|-----------|---------------|
| EAN/UPC | 8422248021227 |
| Subfamily | In Line |

General features

| | |
|--|--------------|
| Motor type | AC/INDUCTION |
| Motor power (W) | 18;40 |
| Lightning Technology | N/A |
| Light Quantity | N/A |
| Filter Type | N/A |
| Number of layers | N/A |
| Control description | N/A |
| Power levels | 2 |
| Timer | - |
| Timer Hygro | - |
| Electronic filter saturation indicator | - |
| Dimmable lighting | - |

Installation

| | |
|---------------------------|------|
| Width (mm) | 279 |
| Height (mm) | 232 |
| Depth (mm) | 168 |
| Total minimum height (mm) | 2300 |
| Outlet diameter (mm) | 122 |
| Maximum pressure (Pa) | 150 |
| Anti-return flap included | - |
| Easy installation system | No |

Power connection

| | |
|-----------------------------------|----------|
| Rated voltage (V) | 230 |
| Rated frequency (Hz) | 50 |
| Rated power input (W) | 18;40 |
| Protection against electric shock | Class II |
| Plug type | No plug |

Accessories

| | |
|----------------------|---------|
| Fixed Grid | 1920200 |
| Overpressure shutter | 1920300 |
| Speed Switch | 1142001 |

Power and water connection

| | |
|-----------------------------------|----------|
| Rated voltage (V) | 230 |
| Rated frequency (Hz) | 50 |
| Rated power input (W) | 18;40 |
| Protection against electric shock | Class II |
| Plug type | No plug |