




TFH 6430 X

Cod. 02010609

EAN 8422248343626

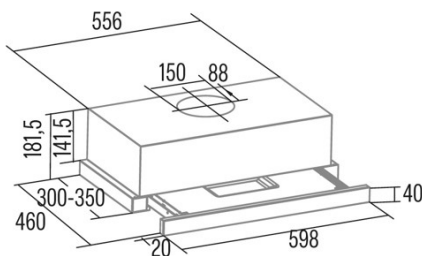

INFORMACIÓN GENERAL

EAN/UPC	8422248343626
Subfamily	Telescopic

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Energy consumption per year) (kWh/año)	13,4
EEl class (Energy efficiency class)	A+
FDE (Fluid dynamic efficiency)	Europe
FDE class (Fluid dynamic efficiency class)	B
LE (Light efficiency) (lux/W)	18
LE class (Light efficiency class)	C
GFE (Grease filtering efficiency)	230
GFE Class (Grease filtering efficiency class)	C
Normal mode airflow MIN (m3/h)	164,1
Normal mode airflow MAX (m3/h)	320,4
Boost mode airflow (m3/h)	Hoods
Normal mode acoustic power MIN (dB)	44
Normal mode acoustic power MAX (dB)	80
Boost mode acoustic power (dB)	65pean
Po (Off-mode power consumption) (W)	0,45
Ps (Stand-by power consumption) (W)	0

Integration directive EU 66/2014

f (Factor Increase in the time)	1,1
EEl (Energy efficiency Index)	41,5
QBEP (Maximum airflow point efficiency) (m3/h)	164,6
PBEP (Maximum pressure point efficiency) (Pa)	Reach
WBEP (Electrical power consumption at maximum efficiency) (W)	27,9
WL (Rated power lighting system) (W)	3
EMIDDLE (Average illuminance on the cooking surface) (lux)	54

External Dimensions

Depth (mm)	320
Maximum Total Height (mm)	182
Minimum Total Height (mm)	182

Characteristics

Motor Quantity	1
Motor Model	EY400 395 b
Filter Technology	Aluminium mesh
Control Tecnology	Electronic Touch Control
Booster	310
Power levels	4
Timer	-
Filter Saturation Indicator	√
Charcoal Filter Change Indicator	-
Dimmer Function	√
Connectivity	No
Display	Display

Installation

Minimum distance to an electric cooktop (mm)	\$
Minimum distance to a gas cooktop (mm)	60cm
Recirculation Option	-
Charcoal Filter	CATA
Back Draught Shutter	No
Inner shield	Inspection Report

Electric Connection

Rated voltage (V)	220-240
-------------------	---------

Accessories

White Decorative Duct	C
DUAL Filter (metal + active charcoal)	in
Active Charcoal Filter	02859394
Noiseless Flexible Duct	02893002