


# AS 600

Cod. **08000406**

EAN **8422248198554**

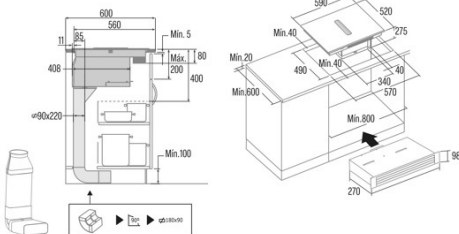

## INFORMACIÓN GENERAL

EAN/UPC	8422248198554
Subfamily	Flow-in

### Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Energy consumption per year) (kWh/año)	29
EEL class (Energy efficiency class)	A+
FDE (Fluid dynamic efficiency)	32
FDE class (Fluid dynamic efficiency class)	A
LE (Light efficiency) (lux/W)	0
GFE (Grease filtering efficiency)	45,8
GFE Class (Grease filtering efficiency class)	F
Normal mode airflow MIN (m3/h)	246,4
Normal mode airflow MAX (m3/h)	446,3
Boost mode airflow (m3/h)	531,5
Normal mode acoustic power MIN (dB)	45
Normal mode acoustic power MAX (dB)	64
Boost mode acoustic power (dB)	67
Po (Off-mode power consumption) (W)	0,4
Ps (Stand-by power consumption) (W)	0

### Product fiche

Number of cooking zones	4
Zone 1: Technology	Induction
Zone 1: Zone type	Rectangular Flexible
Zone 1: Position	Front Left
Zone 1: Diameter of the zone (mm)	19
Zone 1: Power (kW)	15
Zone 1: Booster (kW)	2
Zone 1: Consumption (Wh / kg)	193,56
Zone 2: Technology	Induction
Zone 2: Zone type	Rectangular Flexible
Zone 2: Position	Rear Left
Zone 2: Diameter of the zone (mm)	19
Zone 2: Power (kW)	2
Zone 2: Booster (kW)	2,8
Zone 2: Consumption (Wh / kg)	173,73
Zone 3: Technology	Induction
Zone 3: Zone type	Rectangular Flexible
Zone 3: Position	Rear Right
Zone 3: Diameter of the zone (mm)	19
Zone 3: Power (kW)	2
Zone 3: Booster (kW)	2,8
Zone 3: Consumption (Wh / kg)	191,01
Zone 4: Technology	Induction
Zone 4: Zone type	Rectangular Flexible
Zone 4: Position	Front Right
Zone 4: Diameter of the zone (mm)	19
Zone 4: Power (kW)	1,5
Zone 4: Booster (kW)	2
Zone 4: Consumption (Wh / kg)	189,12

### Integration directive EU 66/2014

f (Factor Increase in the time)	1
EEL (Energy efficiency Index)	49,2
QBEP (Maximum airflow point efficiency) (m3/h)	264,3
PBEP (Maximum pressure point efficiency) (Pa)	294
WBEP (Electrical power consumption at maximum efficiency) (W)	79,4
WL (Rated power lighting system) (W)	0

### Dimensions

Width (mm)	590
Height (mm)	275
Depth (mm)	520
Built-in width (mm)	570
Built-in depth (mm)	504
Easy installation System	Quick Fix

### External Dimensions

Width (mm)	590
Depth (mm)	520
Maximum Total Height (mm)	275
Minimum Total Height (mm)	570
Outlet Diameter (mm)	150

### Finishing

Material	Glass
Bevel	Front
Frame	No
Cooking supports	N/A

### Characteristics

Motor Quantity	1
Motor Model	BT4DC
Filter Technology	Aluminium mesh
Control Technology	TFT
Booster	√
Power levels	6
Timer	√
Filter Saturation Indicator	-
Charcoal Filter Change Indicator	-
Dimmer Function	-
Connectivity	√
Remote control	-
Display	Display

### Control

Control type	TFT
Control Position	Front Centre
Independent control by zone	-
Hidden control	-
Power levels	9 + Booster
Knob type	N/A
Cooking time programming	√
Power management	-
Available Power Limits (kW)	No
Connectivity	Auto
Auto Ignition	N/A

### Security

Security lock	√
Child lock	Yes (Key)
Residual heat indicator	√
Automatic detection of cookware	√
Intelligent detection of cookware	-
Automatic safety shutdown	√
Liquid spill protection	√
Safety Valve	-

### Installation

Recirculation Option	-
Charcoal Filter	-
Back Draught Shutter	No
Inner shield	-

### Electrical connection

Rated voltage (V)	220-240
Rated frequency (Hz)	50/60
Rated power input (W)	7335

---

Protection against electric shock	Class I
Plug type	No plug

---

#### **Electric Connection**

---

Rated voltage (V)	220-240
Rated frequency (Hz)	50/60
Rated power input (W)	7335
Protection against electric shock	Class I
Plug type	No plug

---

#### **Accessories**

---

Recirculating kit	02800992 + 02801000
-------------------	---------------------

---