




INSB 6032 BK

Cod. **08063404**

EAN **8422248109482**

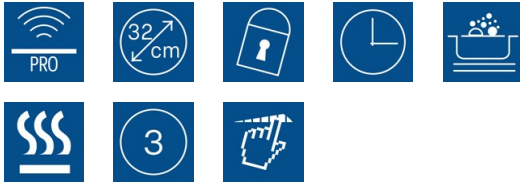

INFORMACIÓN GENERAL

EAN/UPC	8422248109482
Subfamily	Induction

Product fiche

Number of cooking zones	3
Zone 1: Technology	Induction
Zone 1: Zone type	Simple
Zone 1: Position	Front Left
Zone 1: Diameter of the zone (mm)	21
Zone 1: Booster (kW)	2,6
Zone 1: Consumption (Wh / kg)	191,5
Zone 1B: Diameter of the zone (mm)	N/A
Zone 1C: Diameter of the zone (mm)	N/A
Zone 2: Technology	Induction
Zone 2: Zone type	Simple
Zone 2: Diameter of the zone (mm)	16
Zone 2: Power (kW)	170
Zone 2: Booster (kW)	1,5
Zone 2B: Diameter of the zone (mm)	N/A
Zone 2B: Consumption (Wh / kg)	ue
Zone 3: Technology	LifeStyle
Zone 3: Zone type	Double
Zone 3: Position	550
Zone 3: Power (kW)	3
Zone 3: Consumption (Wh / kg)	604
Zone 3B: Diameter of the zone (mm)	19
Zone 3B: Power (kW)	1,5
Zone 3B: Booster (kW)	1,8
Zone 3C: Diameter of the zone (mm)	N/A
Zone 4: Technology	N/A
Zone 4: Zone type	N/A
Zone 4: Position	N/A
Zone 4C: Diameter of the zone (mm)	N/A
Zone 5: Technology	N/A
Zone 5: Diameter of the zone (mm)	N/A
Zone 5: Consumption (Wh / kg)	Reach
Zone 5B: Diameter of the zone (mm)	N/A
Zone 5C: Diameter of the zone (mm)	N/A
Zone 6: Zone type	N/A
Zone 6: Position	N/A
Zone 6: Diameter of the zone (mm)	N/A
Zone 6B: Diameter of the zone (mm)	CATA
Zone 6C: Diameter of the zone (mm)	N/A

Dimensions

Width (mm)	630
Height (mm)	58
Depth (mm)	520
Built-in width (mm)	565
Buit-in height (mm)	√
Built-in depth (mm)	495
Easy installation System	230

Finishing

Material	Glass
Bevel	Front
Frame	No
Cooking supports	N/A

Control

Control type	Slider Touch Control
--------------	----------------------

Hidden control	-
Power levels	9 + Booster
Knob type	N/A
Cooking time programming	√
Countdown alarm	√
Power management	√
Available Power Limits (kW)	1930
Connectivity	\$
Auto Ignition	N/A

Security

Residual heat indicator	European
Intelligent detection of cookware	-
Automatic safety shutdown	√
Safety Valve	-

Electrical connection

Rated frequency (Hz)	50/60
Rated power input (W)	7,2
Multi Phase Connection Option	phases
Protection against electric shock	Front
Power cord length (m)	1
Plug type	No plug

Accessories

Sensor for low-temperature cooking	477
Barbecue grill	No