




X-MART 10 MATIC

Cod. 01015000

EAN 8422248003544

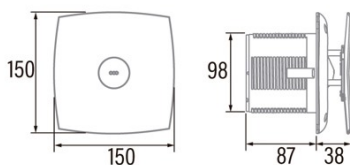

INFORMACIÓN GENERAL

| | |
|-----------|---------------|
| EAN/UPC | 8422248003544 |
| Subfamily | Axial |

General features

| | |
|--|----------------|
| Motor type | AC/SHADED POLE |
| Motor Model | SP5812 |
| Motor power (W) | 15 |
| Lightning Technology | N/A |
| Light Quantity | N/A |
| Filter Type | N/A |
| Number of layers | N/A |
| Control description | N/A |
| Power levels | N/A |
| Timer | - |
| Timer Hygro | - |
| Electronic filter saturation indicator | - |
| Dimmable lighting | - |

Installation

| | |
|---------------------------|-----------|
| Width (mm) | 150 |
| Height (mm) | 150 |
| Depth (mm) | 87 |
| Total minimum height (mm) | 2300 |
| Outlet diameter (mm) | 98 |
| Maximum pressure (Pa) | 25 |
| Anti-return flap included | - |
| Easy installation system | Quick_Flx |

Power connection

| | |
|-----------------------------------|----------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 15 |
| Protection against electric shock | Class II |
| Plug type | No plug |

Accessories

| | |
|----------------------|---------|
| Fixed Grid | 1910200 |
| Overpressure shutter | 1910300 |
| Window Kit | 1970000 |
| Window Fixing Ring | 1910100 |
| Backdraught Shutter | 1990097 |

Power and water connection

| | |
|-----------------------------------|----------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 15 |
| Protection against electric shock | Class II |
| Plug type | No plug |