





ISLA MOON

Cod. **02119203**

EAN **8422248062084**

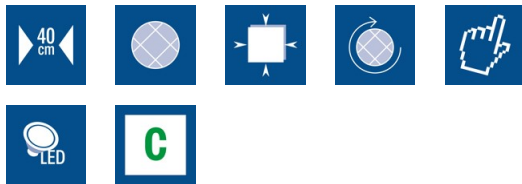

INFORMACIÓN GENERAL

| | |
|-----------|---------------|
| EAN/UPC | 8422248062084 |
| Subfamily | Island |

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|------|
| AEC (Energy consumption per year) (kWh/año) | 97,1 |
| EEL class (Energy efficiency class) | C |
| FDE (Fluid dynamic efficiency) | 15,9 |
| FDE class (Fluid dynamic efficiency class) | D |
| LE (Light efficiency) (lux/W) | 14,3 |
| LE class (Light efficiency class) | D |
| GFE (Grease filtering efficiency) | 91,2 |
| GFE Class (Grease filtering efficiency class) | B |
| Normal mode airflow MIN (m3/h) | 300 |
| Normal mode airflow MAX (m3/h) | 645 |
| Normal mode acoustic power MIN (dB) | 48 |
| Normal mode acoustic power MAX (dB) | 63 |
| Po (Off-mode power consumption) (W) | 0,45 |
| Ps (Stand-by power consumption) (W) | 0 |

Integration directive EU 66/2014

| | |
|---|-------|
| f (Factor Increase in the time) | 1,4 |
| EEL (Energy efficiency Index) | 84,1 |
| QBEP (Maximum airflow point efficiency) (m3/h) | 386,4 |
| PBEP (Maximum pressure point efficiency) (Pa) | 254 |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 171,5 |
| WL (Rated power lighting system) (W) | 10,5 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 150 |

External Dimensions

| | |
|---------------------------|------|
| Width (mm) | 400 |
| Depth (mm) | 400 |
| Maximum Total Height (mm) | 1700 |
| Minimum Total Height (mm) | 860 |

Characteristics

| | |
|----------------------------------|--------------------------|
| Motor Quantity | 1 |
| Motor Model | BT2 |
| Maximum Pressure (Pa) | 400 |
| Filter Technology | Aluminium mesh |
| Control Technology | Electronic Touch Control |
| Booster | - |
| Power levels | 3 |
| Timer | √ |
| Filter Saturation Indicator | √ |
| Charcoal Filter Change Indicator | - |
| Dimmer Function | √ |
| Connectivity | - |
| Remote control | - |
| Display | Display_grafico |

Lighting

| | |
|---------------------|----------|
| Light Model | ECOLED 2 |
| Lighting Technology | LED |

Installation

| | |
|--|-----|
| Minimum distance to an electric cooktop (mm) | 650 |
| Minimum distance to a gas cooktop (mm) | 650 |
| Recirculation Option | √ |
| Charcoal Filter | - |

| | |
|----------------------|---|
| Back Draught Shutter | - |
| Inner shield | - |

Electric Connection

| | |
|-----------------------------------|----------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50 |
| Rated power input (W) | 210,5 |
| Protection against electric shock | Class II |
| Plug type | No plug |

Accessories

| | |
|---------------------------------|----|
| Upper Decorative Duct Extension | No |
| White Decorative Duct | No |
| Black Decorative Duct | No |
| Island Tube Enhancer | No |
| Back Draught Shutter | No |
| MAX PRO Metal Filter | No |
| Active Charcoal Filter | No |
| Noiseless Flexible Duct | No |
| Recirculating kit | No |
