




## CTRC-30-M

Cod. 03110003

EAN 8422248096621

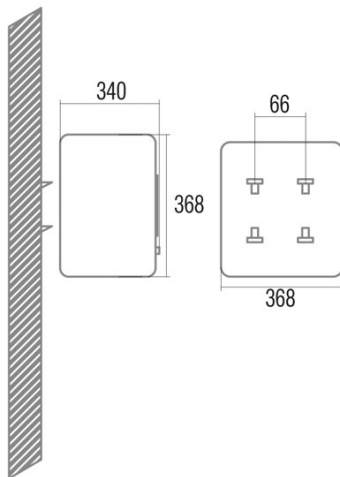

### INFORMACIÓN GENERAL

EAN/UPC	8422248096621
Subfamily	Electric

### Product fiche according to EU Regulation nº 812/2012

Declared Load Profile	S
Water Heating Energy Class	C
Water Heating Energy Efficiency (%)	33
Annual electricity consumption (kWh/year)	558
Thermostat temperature settings	75

### Features

Capacity (L)	30
Number of persons	1-2
Installation	Vertical
Minimum set temperature	30
Maximum set temperature	75
Type of heating element	Enamel
Heating time 15°C-65°C (min)	33
Static losses 65°C (kWh/24h)	2,46
Coating thickness (mm)	5

### Controls

Type of control	Mechanical
Control position	Front
Electrical connection indicator	-
Temperature indicator	-
Heating indicator	-

### Safety

Overheating protection	√
Safety temperature (°C)	101
Freezing protection	-
Water protection index	IPX4
Maximum Working Pressure (Mpa)	0,75
Magnesium Anode Dimensions (mm)	D18x110

### Power connection

Rated voltage (V)	220-240
Rated frequency (Hz)	50/60
Rated power input (W)	1500
Protection against electric shock	Class I
Power cord length (m)	1,5
Plug type	Type F

### Installation

Width (mm)	440
Height (mm)	440
Depth (mm)	420