




## CTR-80-M

Cod. 03112003

EAN 8422248081542

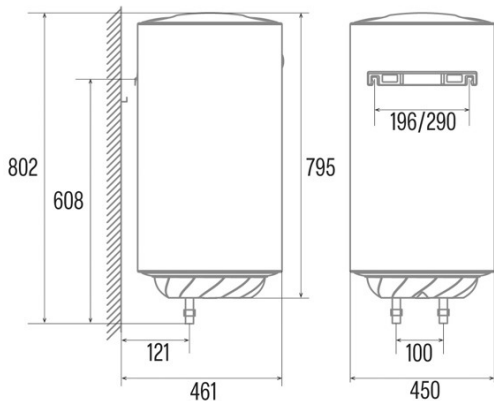

### INFORMACIÓN GENERAL

|           |               |
|-----------|---------------|
| EAN/UPC   | 8422248081542 |
| Subfamily | Electric      |

### Product fiche according to EU Regulation nº 812/2012

|   |      |
|---|------|
| Declared Load Profile                     | M    |
| Water Heating Energy Class                | C    |
| Water Heating Energy Efficiency (%)       | 37,1 |
| Annual electricity consumption (kWh/year) | 1382 |
| Thermostat temperature settings           | 75   |

### Features

|                              |          |
|------------------------------|----------|
| Capacity (L)                 | 80       |
| Number of persons            | 2-4      |
| Installation                 | Vertical |
| Minimum set temperature      | 30       |
| Maximum set temperature      | 75       |
| Type of heating element      | Enamel   |
| Heating time 15°C-65°C (min) | 186,6    |
| Static losses 65°C (kWh/24h) | 1,38     |
| Coating thickness (mm)       | 5        |

### Controls

|                                 |            |
|---------------------------------|------------|
| Type of control                 | Mechanical |
| Control position                | Bottom     |
| Electrical connection indicator | -          |
| Temperature indicator           | √          |
| Heating indicator               | √          |

### Safety

|                                 |         |
|---------------------------------|---------|
| Overheating protection          | √       |
| Safety temperature (°C)         | 82      |
| Freezing protection             | -       |
| Water protection index          | IPX4    |
| Maximum Working Pressure (Mpa)  | 0,75    |
| Magnesium Anode Dimensions (mm) | D22x296 |

### Power connection

|                                   |         |
|-----------------------------------|---------|
| Rated voltage (V)                 | 220-240 |
| Rated frequency (Hz)              | 50/60   |
| Rated power input (W)             | 1500    |
| Protection against electric shock | Class I |
| Power cord length (m)             | 1,5     |
| Plug type                         | Type F  |

### Installation

|             |     |
|-------------|-----|
| Width (mm)  | 450 |
| Height (mm) | 805 |
| Depth (mm)  | 450 |