


AS 600

Cod. **08000406**

EAN **8422248198554**

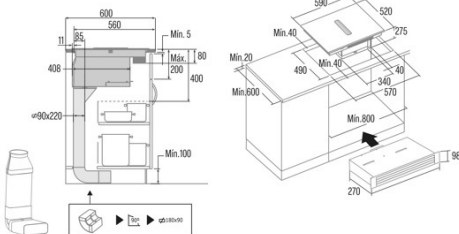

INFORMACIÓN GENERAL

| | |
|-----------|---------------|
| EAN/UPC | 8422248198554 |
| Subfamily | Flow-in |

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|-------|
| AEC (Energy consumption per year) (kWh/año) | 29 |
| EEL class (Energy efficiency class) | A+ |
| FDE (Fluid dynamic efficiency) | 32 |
| FDE class (Fluid dynamic efficiency class) | A |
| LE (Light efficiency) (lux/W) | 0 |
| GFE (Grease filtering efficiency) | 45,8 |
| GFE Class (Grease filtering efficiency class) | F |
| Normal mode airflow MIN (m3/h) | 246,4 |
| Normal mode airflow MAX (m3/h) | 446,3 |
| Boost mode airflow (m3/h) | 531,5 |
| Normal mode acoustic power MIN (dB) | 45 |
| Normal mode acoustic power MAX (dB) | 64 |
| Boost mode acoustic power (dB) | 67 |
| Po (Off-mode power consumption) (W) | 0,4 |
| Ps (Stand-by power consumption) (W) | 0 |

Product fiche

| | |
|-----------------------------------|----------------------|
| Number of cooking zones | 4 |
| Zone 1: Technology | Induction |
| Zone 1: Zone type | Rectangular Flexible |
| Zone 1: Position | Front Left |
| Zone 1: Diameter of the zone (mm) | 19 |
| Zone 1: Power (kW) | 15 |
| Zone 1: Booster (kW) | 2 |
| Zone 1: Consumption (Wh / kg) | 193,56 |
| Zone 2: Technology | Induction |
| Zone 2: Zone type | Rectangular Flexible |
| Zone 2: Position | Rear Left |
| Zone 2: Diameter of the zone (mm) | 19 |
| Zone 2: Power (kW) | 2 |
| Zone 2: Booster (kW) | 2,8 |
| Zone 2: Consumption (Wh / kg) | 173,73 |
| Zone 3: Technology | Induction |
| Zone 3: Zone type | Rectangular Flexible |
| Zone 3: Position | Rear Right |
| Zone 3: Diameter of the zone (mm) | 19 |
| Zone 3: Power (kW) | 2 |
| Zone 3: Booster (kW) | 2,8 |
| Zone 3: Consumption (Wh / kg) | 191,01 |
| Zone 4: Technology | Induction |
| Zone 4: Zone type | Rectangular Flexible |
| Zone 4: Position | Front Right |
| Zone 4: Diameter of the zone (mm) | 19 |
| Zone 4: Power (kW) | 1,5 |
| Zone 4: Booster (kW) | 2 |
| Zone 4: Consumption (Wh / kg) | 189,12 |

Integration directive EU 66/2014

| | |
|---|-------|
| f (Factor Increase in the time) | 1 |
| EEL (Energy efficiency Index) | 49,2 |
| QBEP (Maximum airflow point efficiency) (m3/h) | 264,3 |
| PBEP (Maximum pressure point efficiency) (Pa) | 294 |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 79,4 |
| WL (Rated power lighting system) (W) | 0 |

Dimensions

| | |
|--------------------------|-----------|
| Width (mm) | 590 |
| Height (mm) | 275 |
| Depth (mm) | 520 |
| Built-in width (mm) | 570 |
| Built-in depth (mm) | 504 |
| Easy installation System | Quick Fix |

External Dimensions

| | |
|---------------------------|-----|
| Width (mm) | 590 |
| Depth (mm) | 520 |
| Maximum Total Height (mm) | 275 |
| Minimum Total Height (mm) | 570 |
| Outlet Diameter (mm) | 150 |

Finishing

| | |
|------------------|-------|
| Material | Glass |
| Bevel | Front |
| Frame | No |
| Cooking supports | N/A |

Characteristics

| | |
|----------------------------------|----------------|
| Motor Quantity | 1 |
| Motor Model | BT4DC |
| Filter Technology | Aluminium mesh |
| Control Technology | TFT |
| Booster | √ |
| Power levels | 6 |
| Timer | √ |
| Filter Saturation Indicator | - |
| Charcoal Filter Change Indicator | - |
| Dimmer Function | - |
| Connectivity | √ |
| Remote control | - |
| Display | Display |

Control

| | |
|-----------------------------|--------------|
| Control type | TFT |
| Control Position | Front Centre |
| Independent control by zone | - |
| Hidden control | - |
| Power levels | 9 + Booster |
| Knob type | N/A |
| Cooking time programming | √ |
| Power management | - |
| Available Power Limits (kW) | No |
| Connectivity | Auto |
| Auto Ignition | N/A |

Security

| | |
|-----------------------------------|-----------|
| Security lock | √ |
| Child lock | Yes (Key) |
| Residual heat indicator | √ |
| Automatic detection of cookware | √ |
| Intelligent detection of cookware | - |
| Automatic safety shutdown | √ |
| Liquid spill protection | √ |
| Safety Valve | - |

Installation

| | |
|----------------------|----|
| Recirculation Option | - |
| Charcoal Filter | - |
| Back Draught Shutter | No |
| Inner shield | - |

Electrical connection

| | |
|-----------------------|---------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 7335 |

| | |
|-----------------------------------|---------|
| Protection against electric shock | Class I |
| Plug type | No plug |

Electric Connection

| | |
|-----------------------------------|---------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 7335 |
| Protection against electric shock | Class I |
| Plug type | No plug |

Accessories

| | |
|-------------------|---------------------|
| Recirculating kit | 02800992 + 02801000 |
|-------------------|---------------------|
