




GS-400 M

Cod. 00114102

EAN 8422248100403

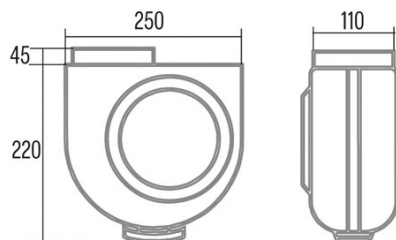

INFORMACIÓN GENERAL

EAN/UPC	8422248100403
Subfamily	Kitchen Extractor

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Energy consumption per year) (kWh/año)	29,2
EEL class (Energy efficiency class)	B
FDE (Fluid dynamic efficiency)	10,7
FDE class (Fluid dynamic efficiency class)	E
LE class (Light efficiency class)	N_A
GFE Class (Grease filtering efficiency class)	N_A
Normal mode airflow MAX (m3/h)	290
Normal mode acoustic power MAX (dB)	52
Po (Off-mode power consumption) (W)	0
Ps (Stand-by power consumption) (W)	0

Integration directive EU 66/2014

f (Factor Increase in the time)	1,6
EEL (Energy efficiency Index)	68,7
QBEP (Maximum airflow point efficiency) (m3/h)	163,2
PBEP (Maximum pressure point efficiency) (Pa)	117
WBEP (Electrical power consumption at maximum efficiency) (W)	49,6

External Dimensions

Width (mm)	250
Depth (mm)	110
Minimum Total Height (mm)	650
Outlet Diameter (mm)	110

Characteristics

Motor Quantity	1
Maximum Pressure (Pa)	210
Free Outlet Airflow (m3/h)	290
Booster	-
Timer	-
Charcoal Filter Change Indicator	-
Remote control	-

Installation

Minimum distance to an electric cooktop (mm)	65
Minimum distance to a gas cooktop (mm)	650
Recirculation Option	-
Charcoal Filter	-
Back Draught Shutter	-
Inner shield	-

Electric Connection

Rated voltage (V)	230
Rated frequency (Hz)	50
Rated power input (W)	60
Protection against electric shock	Class I
Power cord length (m)	0,5
Plug type	No plug

Accessories

Upper Decorative Duct Extension	N_A
White Decorative Duct	N_A
Black Decorative Duct	N_A
Island Tube Enhancer	N_A
Back Draught Shutter	N_A

MAX PRO Metal Filter	N_A
Active Charcoal Filter	N_A
Noiseless Flexible Duct	N_A
Recirculating kit	N_A