




# TFH 6430 GWH

Cod. **02010009**

EAN **8422248343619**



- ✓ Panel de Control táctil con display digital, temporizador de desconexión automática e indicador de limpieza de filtros
- ✓ 4 niveles de extracción, 3 + 1 TURBO
- ✓ Capacidad de extracción máxima - mínima(Reg.(UE) nº65/2014): 391m3/h
- ✓ 164m3/h
- ✓ Nivel sonoro (Reg.(UE) nº65/2014):44dB(A), máximo: 62dB(A)
- ✓ Motor Brushless. Extra silencioso. Consumomáximo de energía 53W
- ✓ Iluminación de alta eficiencia mediante tira LED regulable en intensidad
- ✓ Clase de eficiencia energética: A+



## INFORMACIÓN GENERAL

EAN/UPC	8422248343619
Subfamily	Telescopic

### Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Energy consumption per year) (kWh/año)	13,4
EEl class (Energy efficiency class)	A+
FDE (Fluid dynamic efficiency)	24,9
FDE class (Fluid dynamic efficiency class)	B
LE (Light efficiency) (lux/W)	18
LE class (Light efficiency class)	C
GFE (Grease filtering efficiency)	79,9
GFE Class (Grease filtering efficiency class)	C
Normal mode airflow MIN (m3/h)	164,1
Normal mode airflow MAX (m3/h)	320,4
Boost mode airflow (m3/h)	391,5
Normal mode acoustic power MIN (dB)	44
Normal mode acoustic power MAX (dB)	62
Boost mode acoustic power (dB)	65
Po (Off-mode power consumption) (W)	0,45
Ps (Stand-by power consumption) (W)	0

### Integration directive EU 66/2014

f (Factor Increase in the time)	1,1
EEl (Energy efficiency Index)	41,5
QBEP (Maximum airflow point efficiency) (m3/h)	164,6
PBEP (Maximum pressure point efficiency) (Pa)	152
WBEP (Electrical power consumption at maximum efficiency) (W)	27,9
WL (Rated power lighting system) (W)	3
EMIDDLE (Average illuminance on the cooking surface) (lux)	54

### External Dimensions

Width (mm)	598
Depth (mm)	320
Maximum Total Height (mm)	182
Minimum Total Height (mm)	182
Outlet Diameter (mm)	150

### Characteristics


Motor Quantity	1
Motor Model	EY400 395 b
Filter Technology	Aluminium mesh
Control Technology	Electronic Touch Control
Booster	✓
Power levels	4
Timer	-
Filter Saturation Indicator	✓
Charcoal Filter Change Indicator	-
Dimmer Function	✓
Connectivity	No
Remote control	-
Display	Display

### Lighting

Light Model	SSLED
Lightning Technology	LED

### Installation

Minimum distance to an electric cooktop (mm)	550
Minimum distance to a gas cooktop (mm)	650

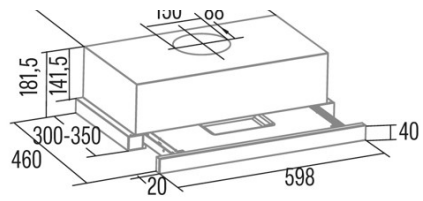

Recirculation Option	-
Charcoal Filter	√
Back Draught Shutter	No
Inner shield	-

#### Electric Connection

Rated voltage (V)	220-240
Rated frequency (Hz)	50/60
Protection against electric shock	Class I
Plug type	No plug

#### Accessories

Active Charcoal Filter	02859394
Noiseless Flexible Duct	02893002