




EXTENDER 600

Cod. 02017606

EAN 8422248110334

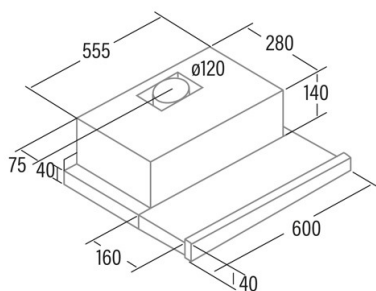

INFORMACIÓN GENERAL

EAN/UPC	8422248110334
Subfamily	Telescopic

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Energy consumption per year) (kWh/año)	Detail
EEl class (Energy efficiency class)	C
FDE class (Fluid dynamic efficiency class)	E
LE (Light efficiency) (lux/W)	40
LE class (Light efficiency class)	A
GFE (Grease filtering efficiency)	68
GFE Class (Grease filtering efficiency class)	D
Normal mode airflow MIN (m3/h)	150
Normal mode airflow MAX (m3/h)	390
Normal mode acoustic power MIN (dB)	45,5
Normal mode acoustic power MAX (dB)	57

Integration directive EU 66/2014

f (Factor Increase in the time)	1,6
EEl (Energy efficiency Index)	78,2
PBEP (Maximum pressure point efficiency) (Pa)	12,5
WBEP (Electrical power consumption at maximum efficiency) (W)	69
WL (Rated power lighting system) (W)	7
EMIDDLE (Average illuminance on the cooking surface) (lux)	252

External Dimensions

Depth (mm)	440
Maximum Total Height (mm)	181
Outlet Diameter (mm)	120

Characteristics

Motor Quantity	1
Motor Model	TF2003
Maximum Pressure (Pa)	194
Filter Technology	Aluminium mesh
Control Tecnology	Mechanical rocker switch
Power levels	2
Timer	-
Filter Saturation Indicator	-
Charcoal Filter Change Indicator	-
Dimmer Function	-
Connectivity	-
Remote control	-
Display	-

Lighting

Light Model	ECOLED
-------------	--------

Installation

Minimum distance to an electric cooktop (mm)	556
Minimum distance to a gas cooktop (mm)	656
Inner shield	German;ES_Spanish;PT_Portuguese;FR_F

Electric Connection

Rated voltage (V)	220-240
Rated frequency (Hz)	50
Rated power input (W)	107
Protection against electric shock	Class I

Accessories

Active Charcoal Filter	02825267
Noiseless Flexible Duct	02800004

