




JUNO+ 7000 GWH 220-240V 50/60Hz

Cod. **02078801**

EAN **8422248355667**

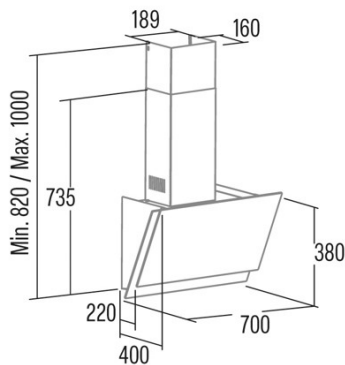

INFORMACIÓN GENERAL

| | |
|-----------|---------------|
| EAN/UPC | 8422248355667 |
| Subfamily | Angle Glass |

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

| | |
|---|------|
| AEC (Energy consumption per year) (kWh/año) | 23,1 |
| EEl class (Energy efficiency class) | A+ |
| FDE (Fluid dynamic efficiency) | 33,5 |
| FDE class (Fluid dynamic efficiency class) | A |
| LE (Light efficiency) (lux/W) | 22,6 |
| LE class (Light efficiency class) | B |
| GFE (Grease filtering efficiency) | 60,9 |
| GFE Class (Grease filtering efficiency class) | C |
| Normal mode airflow MIN (m3/h) | 170 |
| Normal mode airflow MAX (m3/h) | 385 |
| Boost mode airflow (m3/h) | 562 |
| Normal mode acoustic power MIN (dB) | 44 |
| Normal mode acoustic power MAX (dB) | 61 |
| Boost mode acoustic power (dB) | 69 |
| Po (Off-mode power consumption) (W) | 0,27 |
| Ps (Stand-by power consumption) (W) | 0 |

Integration directive EU 66/2014

| | |
|---|------|
| <i>f</i> (Factor Increase in the time) | 0,9 |
| EEl (Energy efficiency Index) | 38,8 |
| QBEP (Maximum airflow point efficiency) (m3/h) | 258 |
| PBEP (Maximum pressure point efficiency) (Pa) | 284 |
| WBEP (Electrical power consumption at maximum efficiency) (W) | 62,6 |
| WL (Rated power lighting system) (W) | 5 |
| EMIDDLE (Average illuminance on the cooking surface) (lux) | 22,6 |

External Dimensions

| | |
|---------------------------|------|
| Width (mm) | 900 |
| Depth (mm) | 400 |
| Maximum Total Height (mm) | 1000 |
| Minimum Total Height (mm) | 820 |
| Outlet Diameter (mm) | 150 |

Characteristics

| | |
|----------------------------------|--------------------------|
| Motor Quantity | 1 |
| Motor Model | T1DC |
| Maximum Pressure (Pa) | 250 |
| Filter Technology | Aluminium mesh |
| Control Technology | Electronic Touch Control |
| Booster | √ |
| Power levels | 6 |
| Timer | √ |
| Filter Saturation Indicator | √ |
| Charcoal Filter Change Indicator | √ |
| Dimmer Function | √ |
| Connectivity | √ |
| Remote control | - |
| Display | Display_grafico |

Lighting

| | |
|----------------------|-------|
| Light Model | SSLED |
| Lightning Technology | LED |

Installation

| | |
|--|-----|
| Minimum distance to an electric cooktop (mm) | 500 |
|--|-----|

| | |
|--|-----|
| Minimum distance to a gas cooktop (mm) | 650 |
| Recirculation Option | - |
| Charcoal Filter | - |
| Back Draught Shutter | No |
| Inner shield | - |

Electric Connection

| | |
|-----------------------------------|---------|
| Rated voltage (V) | 220-240 |
| Rated frequency (Hz) | 50/60 |
| Rated power input (W) | 110 |
| Protection against electric shock | Class I |
| Power cord length (m) | 1,3 |
| Plug type | No plug |

Accessories

| | |
|-------------------------|-----------|
| Active Charcoal Filter | '02859394 |
| Noiseless Flexible Duct | '02859394 |
