


## GCB 73 X

Cod. 02031300

EAN 8422248108461

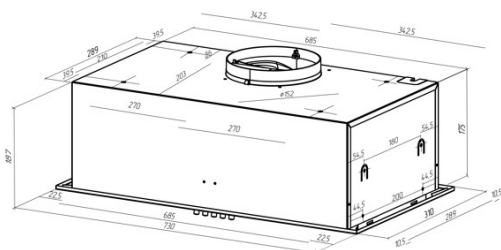

### GENERAL INFORMATION

EAN/UPC	8422248108461
Subfamily	Insert

### Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	54
EEl class (energy efficiency class)	C
FDE (fluid dynamic efficiency)	10,1
FDE class (fluid dynamic efficiency class)	E
LE (light efficiency) (Lux/W)	29,5
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	58,3
GFE class (grease filtering efficiency class)	E
Airflow in normal mode MIN (m3/h)	283,1
Airflow in normal mode MAX (m3/h)	372,2
Acoustic power in normal mode MIN (dB)	60
Acoustic power in normal mode MAX (dB)	66,4
Po (energy consumption in off mode) (W)	0

### Integration directive EU 66/2014

$f$ (time increase factor)	1,64
EEl (Energy Efficiency Index)	83,5
QBEP (maximum efficiency at air flow point) (m3/h)	198,1
PBEP (maximum efficiency at pressure point) (Pa)	160
WBEP (power consumption at maximum efficiency) (W)	86,9
WL (nominal power lighting system) (W)	3
EMIDDLE (Average illuminance on the cooking surface) (lux)	88,4

### External Dimensions

Width (mm)	730
Depth (mm)	310
Maximum total height (mm)	187
Minimum total height (mm)	187
Diamètre de sortie (mm)	150, 125

### Characteristics

Motor quantity	1
Maximum pressure (Pa)	226
Filter technology	Aluminium mesh
Control technology	Mechanical push button
Booster	-
Power levels	3
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	No
Remote control	-
Display	-

### Lighting

Light model	CSLED
Ray technology	LED

### Installation

Minimum distance to electric plate (mm)	550
Minimum distance to gas plate (mm)	650
Recirculation option	√
Charcoal filter	-
Back draught shutter	Included
Inner shield	-

**Electric connection**

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	123
Electric shock protection	Class I

**Accessories**

Activated charcoal filter	02859500
Noiseless flexible duct	02893002