




S PRO 7000 BK

Cod. 02075414

EAN 8422248371476

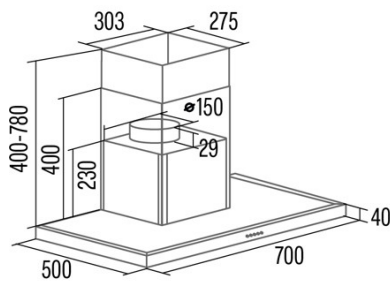

INFORMACIÓN GENERAL

EAN/UPC	8422248371476
Subfamily	Box

Product fiche according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Energy consumption per year) (kWh/año)	67,7
EEl class (Energy efficiency class)	A
FDE (Fluid dynamic efficiency)	29,2
FDE class (Fluid dynamic efficiency class)	A
LE (Light efficiency) (lux/W)	43
LE class (Light efficiency class)	A
GFE (Grease filtering efficiency)	76,3
GFE Class (Grease filtering efficiency class)	C
Normal mode airflow MIN (m3/h)	419
Normal mode airflow MAX (m3/h)	573,9
Boost mode airflow (m3/h)	1001
Normal mode acoustic power MIN (dB)	64
Normal mode acoustic power MAX (dB)	72
Boost mode acoustic power (dB)	75
Po (Off-mode power consumption) (W)	0
Ps (Stand-by power consumption) (W)	0,48

Integration directive EU 66/2014

f (Factor Increase in the time)	0,9
EEl (Energy efficiency Index)	53,8
QBEP (Maximum airflow point efficiency) (m3/h)	489
PBEP (Maximum pressure point efficiency) (Pa)	424
WBEP (Electrical power consumption at maximum efficiency) (W)	196,9
WL (Rated power lighting system) (W)	4,1
EMIDDLE (Average illuminance on the cooking surface) (lux)	176,4

External Dimensions

Width (mm)	760
Depth (mm)	570
Maximum Total Height (mm)	830
Minimum Total Height (mm)	450
Outlet Diameter (mm)	150

Characteristics

Motor Quantity	1
Motor Model	A1000
Filter Technology	Aluminium mesh
Control Technology	PANEL ELECTRONICO DISPLAY DIGITAL
Booster	√
Timer	√
Connectivity	No

Lighting

Light Model	ECOLED
Lightning Technology	LED

Installation

Minimum distance to an electric cooktop (mm)	550
Minimum distance to a gas cooktop (mm)	650
Back Draught Shutter	Included

Electric Connection

Rated voltage (V)	220-240
Rated frequency (Hz)	50
Rated power input (W)	383

Protection against electric shock	Class I
Power cord length (m)	1,2
Plug type	Type F

Accessories

Back Draught Shutter	02800706
----------------------	----------
