




S PRO 7000 X

Cod. 02075411

EAN 8422248371438

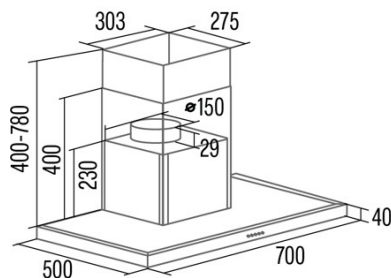

GENERAL INFORMATION

EAN/UPC	8422248371438
Subfamily	Box

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	67,7
EEl class (energy efficiency class)	A
FDE (fluid dynamic efficiency)	29,2
FDE class (fluid dynamic efficiency class)	A
LE (light efficiency) (Lux/W)	43
LE class (light efficiency class)	A
GFE (grease filtering efficiency)	76,3
GFE class (grease filtering efficiency class)	C
Airflow in normal mode MIN (m3/h)	419
Airflow in normal mode MAX (m3/h)	573,9
Airflow in boost mode MIN (m3/h)	1001
Acoustic power in normal mode MIN (dB)	64
Acoustic power in normal mode MAX (dB)	72
Acoustic power boost mode (dB)	75
Po (energy consumption in off mode) (W)	0
Ps (energy consumption in standby mode) (W)	0,48

Integration directive EU 66/2014

f (time increase factor)	0,9
EEl (Energy Efficiency Index)	53,8
QBEP (maximum efficiency at air flow point) (m3/h)	489
PBEP (maximum efficiency at pressure point) (Pa)	424
WBEP (power consumption at maximum efficiency) (W)	196,9
WL (nominal power lighting system) (W)	4,1
EMIDDLE (Average illuminance on the cooking surface) (lux)	176,4

External Dimensions

Width (mm)	760
Depth (mm)	570
Maximum total height (mm)	830
Minimum total height (mm)	450
Diamètre de sortie (mm)	150

Characteristics

Motor quantity	1
Maximum pressure (Pa)	501,17
Filter technology	Aluminium mesh
Control technology	PANEL ELECTRONICO DISPLAY DIGITAL
Power levels	3
Timer	√
Filter saturation indicator	-
Connectivity	No

Lighting

Light model	ECOLED
Ray technology	LED

Installation

Minimum distance to electric plate (mm)	550
Minimum distance to gas plate (mm)	650

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	383

Electric shock protection	Class I
Power cord length (m)	1,2
Plug type	Type F